

Posts Tagged Hootoo

DynDNS replacement for China IP Camera

Posted by [admin](#) on Thursday, 16 February, 2012



0

Tweet 0

Share

Like

What a fucking dyndns.org! About a half year ago, this company suddenly changed his policy that it requires new registered users a paid subscription.

As you may know nearly all the network equipment nowadays support "dyndns.org" protocol to offer ddns services. The sudden changes means no "free lunch" anymore. I know some people may suggest you can use other ddns services outside. However the main point is the ddns binding needs the equipment support. Dyndns.org has already been the free ddns standard for a couple of year since dns2go won't provide free services 10 years ago.



If you are using cloned IP Camera in China. Even though your router may not support third parties ddns e.g. no-ip.org (still free), you are still able to use the 3322.org (a free ddns services) from china as a replacement for dyndns.org.

Since the web of 3322.org is of simplified chinese, for those user of oversea may not understand the chinese. So I attach a series of graphic teach you all guy right there how to register an free "xxxx.3322.org" ddns domain as a replacement of dyndns.org or no-ip.org.

How to Apply a Free 3322 ddns domain?



First go to <http://www.3322.net/accounts/signin/> and register an account

已有 2,409,321 人选择了3322动态域名

第一步：填写账户信息

第二步：激活电子邮箱

账户名：

Input your acc name

邮箱地址：

Input your email address

请再输入一次邮箱：

Double confirm your email address

设置密码：

Fill your password

确认密码：

Double confirm your password

手机号：

13613988888

Copy the below phone number and paste in the fill

注册账户

☒ 我已阅读并接受《服务协议》

I Agree

小辣椒
www.3322.net

已有 2,409,321 人选择了3322动态域名

第一步：填写账户信息

第二步：激活电子信箱



邮箱账户密码提交成功！立即激活账户。
验证邮件已发送至您的邮箱：
您的激活链接在24小时内有效。
抓紧时间激活帐号，使用3322动态域名的服务。

进入邮箱

A email sent to your for verification

[小辣椒3322]注册激活邮件 Inbox [X]

register@qdns.yaako.com to info show details 4:14 PM (2 minutes ago) Reply to all



Hi! 亲爱的 yanmix

感谢您选择3322动态域名。

请点击链接激活帐号：

<http://www.3322.net/accounts/activate/yanmix/1329466456/f56f604c6fc5800c78bc66458826561a/>

(该链接在24小时内有效，24小时后需要重新获取)

如果上面不是链接形式，请将地址复制到您的浏览器(例如IE)的地址栏再访问。

感谢您对3322动态域名的支持，希望您在3322动态域名获得好的服务体验。

我们的新浪微博：<http://weibo.com/ddns3322> 腾讯微博：<http://t.qq.com/ddns3322>

博客：<http://www.3322.net/blog/> WIKI：<http://www.3322.net/wiki/>

(这是一封系统邮件，请勿回复。)

OK, now click the link the email sent to you for verification

小辣椒
www.3322.net

已有 2,409,321 人选择了3322动态域名

第一步：填写账户信息

第二步：激活电子信箱



账户激活成功！立即使用我们的服务。

恭喜您注册成功，您可以使用3322动态域名的以下服务：

[创建动态域名](#) [创建静态域名](#)

进入管理

Click DDNS Management

小辣椒
www.3322.net

用户登录

Fill your register acc name

Find us in Facebook

Sign Up

Create an account or [log in](#) to see what your friends like.



Icamwire on Facebook

Like

4

Facebook social plugin

Recent Comments

- admin on Vstarcam IP Camera H6837WI
- Russ Watson on Vstarcam IP Camera H6837WI
- admin on Vstarcam IP Camera H6837WI
- Russ Watson on Vstarcam IP Camera H6837WI

Most Views

- Vstarcam IP Camera H6837WI - 157 views
- Synology Surveillance and FOSCAM FI8908W - 124 views
- Forum & Firmware now available to Public - 108 views
- EasySE-M2e - First Clone support "fingering" PTZ - 104 views
- Foscam, Hiware, Wansview, EasyN & Apexis Secret - 102 views

iCamwire Forum

Advertisement





创建动态域名

fillin hostname is not occupied by other

立即创建您的动态域名

您的动态域名

域名	IP	创建时间	更新时间
www.3322.org	101.70.144.210	2012-02-16 16:17:24	2012-02-16 16:17:24

OK! now the domain created e.g.

If you are using EasySE-M2e, go to Dynamic DNS Section

your 3322 ddns ac name

Click "Enable"

enter your register hostname e.g. ilovejesus.3322.org

your 3322 ac password

Update Interval

Dynamic DNS (Save success)

Enable ☒

DDNS Provider: www.3322.org(dyndns)

Dynamic DNS: 3322.org

User: [redacted]

Password: [redacted]

Update Interval(Minutes): 10

Status: Processing...

Update Time: 112-02-16 16:21:10

Please "Save", then DONE

Save

Category: Tweak Apexis, easyse, Epyx, Eye Sight Technology, Foscam, Heden, Hootoo, Instar, IPCam, Trenvis, wansview, Zaapa

Comments (0)

How to Stream Video to Web Page

Posted by admin on Thursday, 12 January, 2012

0 Tweet 0 Share Like

One of the strength of clone IP Camera is that it can stream the video from the camera to a web page without having to login and use the supplied GUI. However, different clone's methodology will be different. For example, if you are using EasySE like IR2 or F2 (or its clone), you can stream the video to web page by

```

```

If you want to control the camera you will need a <iframe>

The camera responds to commands with a text string which you can hide in an iframe as the target for the link, example:

```
<iframe name="my_control" border=0 width=1 height=1 ></iframe>
```

Now you can control the camera with a link like this:

```
<a href="your_camera_url:your_camera_port/decoder_control.cgi?command=xx&onestep=5&
user=your_camera_user&pwd=your_camera_pass" Target="my_control">command description </a>
```

xx can be :

- 0 up
- 1 stop up
- 2 down
- 3 stop down
- 4 left
- 5 stop left
- 6 right
- 7 stop right
- 26 vertical patrol
- 27 stop vertical patrol
- 28 horizontal patrol
- 29 stop horizontal patrol

Category: [Tweak](#) [Apexis](#), [Eye Sight Technology](#), [Foscam](#), [Heden](#), [Hootoo](#), [Instar](#), [IPCam](#), [Trenvis](#), [vstarcam](#), [Zaapa](#)

[Comments \(0\)](#)

Vstarcam F6836w Hidden MSN Function

Posted by [admin](#) on Tuesday, 3 January, 2012



0

Tweet | 0

Share

Like


Do you know some kinds of cloned IP Camera support MSN Function? However, the function is hidden. With help of our engineers, We have successfully dissected the www.bin file firmware of Vstarcam F6836w. His detailed directory structure is revealed. We find there is a hidden MSN function in his design (msn.htm). If you have a VStarcam F6836w model, try to visit your ip camera by typing <http://ip:port/msn.htm>, you can find a hidden page.

Does the MSN Function work?

As source near Vstarcam engineers, he said company wont have any plan to support this function. He does think this function is not necessary. However, we find his solution adopted by Vstarcam has this function. If he will adopt it, it really depends of his decision. I have tried to input one of my MSN account information and try to see if this MSN account will online and seem by my another MSN account. The result fails. That indicates this function needs to his app.bin file to help.



There is a MSN.htm file located at the root directory of firmware

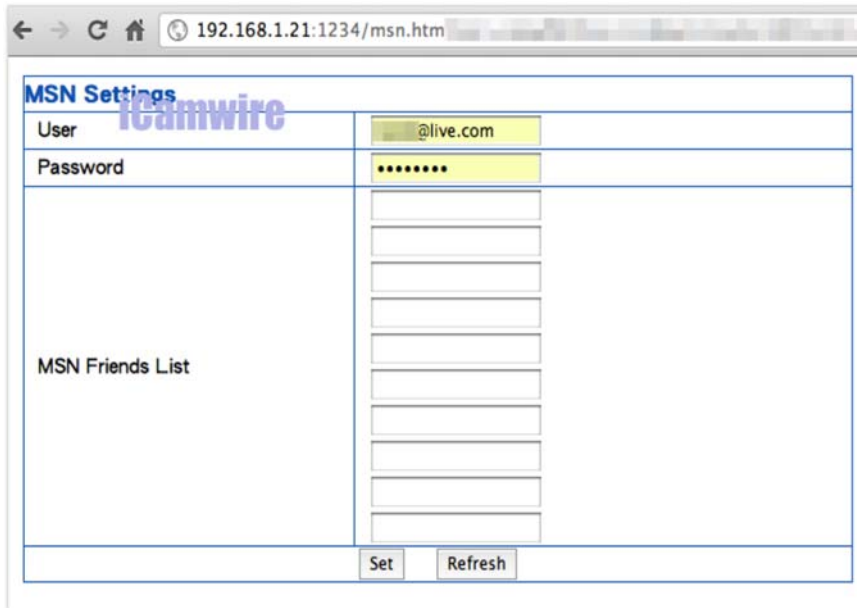

Category: News Apexis, easyn, easyse, Epyx, Eye Sight Technology, Foscam, Heden, hiware, hooboo, Hootoo, Instar, IPCam, smarteye, Trenvis, vstarcam, wansview, Zaapa

Comments (0)

Top 10 Common Problems of Cloned IP Camera

Posted by admin on Monday, 2 January, 2012



0

Tweet 0

Share

Like

There are lots of cloned ip camera in china, no matter you are vendors or buyers (returned buyers). You may find lots of clone camera is not very stable, especially those "newly launched" camera. This is why there is a site called Gadget Victims in the web. You know in the eye of Chinese, they dont see that is a problem. According to the sources from vendors, most of clone ip camera got problems because of

Common Problems Ranking

1. WiFi fail to receive signal
2. WiFi not stable in connection even in short distance
3. Sudden Restart of Camera
4. Restart of Camera when the Camera head moving the left or right end of direction
5. WiFi Connected, but cannot access the camera because of MAC Address "distortion"
6. WiFi's range of connectivity is too short (3 metres)
7. No IP address allocated when connected to network
8. WiFi compatability (e.g. with some LevelOne and buffalo's model)
9. Noise Level is high with Pitch Sound (Foscam and Foscam's Clone)
10. Power Supply Problems

Category: News Apexis, easyn, easyse, Epyx, Eye Sight Technology, Foscam, Heden, hiware, hooboo, Hootoo,

Instar, IPCam, smarteye, Trenvis, wansview, Zaapa

EasySE-M2e – First Clone support “fingering” PTZ

Posted by admin on Sunday, 1 January, 2012



0

Tweet 0

Share

Like

As requested by EasySE's Vendor Yanmix, today we get a newly developed clone ip camera who supports “fingering” PTZ Control, MSN (Checking WAN IP), VLC on Firefox and 16 Preset Keys function. As known, EasySE-M model is now in third generation. It is also a camera who rarely use AJAX Panel in Internet Browser. The significance of this function is to allow no delay in interface transition (Browser no need to refresh). This is especially important in high WAN Latency environment.

EasySE IP Surveillance

[Offical Website](#) [Support Forum](#) [WAN IP Check](#)

English 简体中文 繁體中文 日本語 Русский

Login

Welcome

User:



Password:

☐ Remember Me



More PTZ Controls available


The third generation of EasySE-M2e also support 5 level speed control in PTZ movement with 16 PTZ Preset available. Frame Rate (FPS) is adjustable from 1/sec to 30/sec. More is now it supports Brightness, Contrast, Hue and Saturation Control.

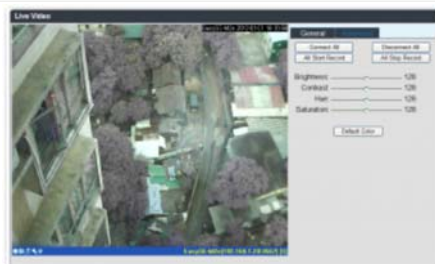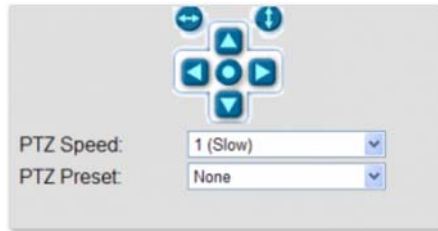

Click to Enlarge

Support VLC over Firefox

As you may know lots of Clone IP Camera is using MJPEG. Other than MJPEG, M2e also support VLC over Firefox. That means users can enjoy MPEG-4 Streaming via the VLC Browser Plugin via Firefox.

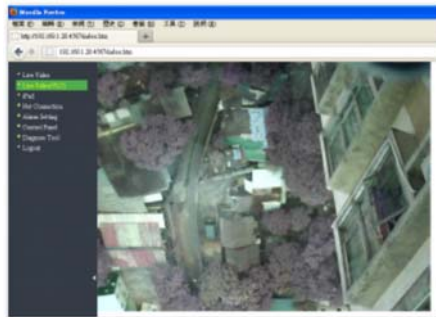


Support an iPad interface with Fingering PTZ Feature

If you are using iPad to access the camera, there is an option allowing you to access the camera via its newly developed iPad interface. Under this interface, you cannot find any PTZ Controls, then how do we PTZ the camera movement? Yes, you can use your finger by pressing the edge of the video windows. Then the camera head will move according to your pressing direction. It is the first china based clone IP Camera supporting this feature.

Support MSN for checking WAN IP

EasySE-M2e supports a MSN Robot. Once it is activated, you can send command line to the MSN to check the latest outer IP and Port number of the camera. This function though may not be new since you may find it in some Wansview model, this is the first one in AJAX IP Camera to support this feature.

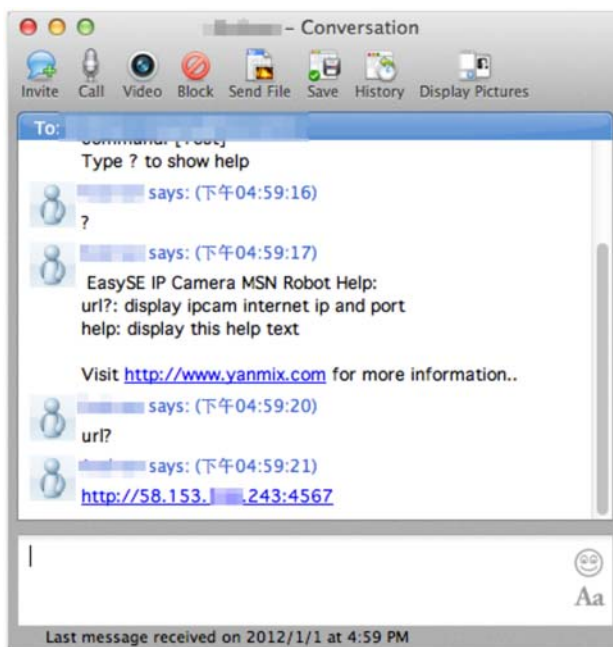

Support WPS One Bottom Connection and uPnP

In order to facilitate the process of installation, when the uPnP is enabled in both router and IP camera, You does not need to do any port forwarding setting. More is if you router support WPS One Botton Setup, you can first press the WPS button in the router (e.g. TP-Link) and then the WPS on the back of the IP Camera. WiFi Connection is easily established.



WPS Button located at the bottom of Antenna

LiveCam Pro, IP Cam Viewer and TinyMonitor Pro have a EasySE-M2 API to support this camera.

Buy from iCamwire [Free International Shipping]

Price : US\$64



Pre-Sales Consultation and After Sales Support

Email : info@yanmix.com

Support Forum

<http://forum.icamwire.com/>

Category: [News](#) [Apexis](#), [easyse](#), [Epyx](#), [Eye Sight Technology](#), [Foscam](#), [Heden](#), [Hootoo](#), [Instar](#), [IPCam](#), [Trenvis](#), [Zaapa](#)

[Comments \(0\)](#)

Wansview Dissection & Breakdown : Make & Repair

Posted by [admin](#) on Saturday, 31 December, 2011




I have a dream. If unfortunately I jailed "brick" the camera, I hope I can repair it. However, before we are going to repair. I think we need to know what are the components inside. The photo taken by ecomer indicates the wireless module (Ralink RT2571WF SN07860E0 1002ST) is pluggable and it has a RF Connector attached. That means if this module is out of function (Actually most clone camera out of function because of wireless), we are able to repair it. (I will be purchase some modules and let you all available in our web, if you really want do it yourself. I will also give u a quotation of components when I go to china next week.

Another findings is:

1. You can change your CMOS lens if you wont like it
2. It may be able to upgradeable to 802.11N
3. Cloned Camera's design are roughly the same.




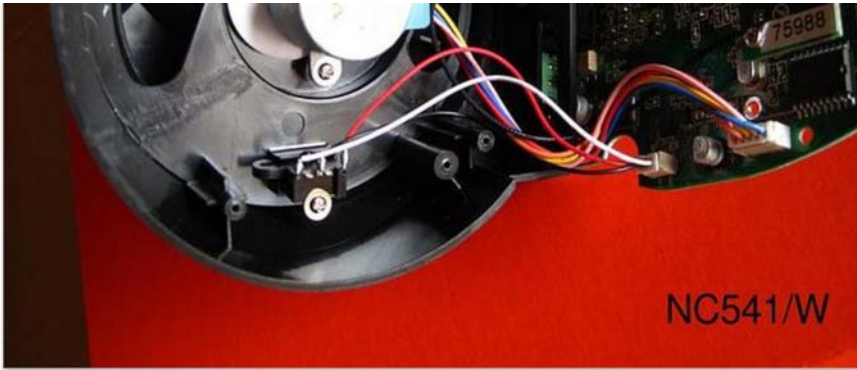




WiFi card - front view






WiFi card - rear view




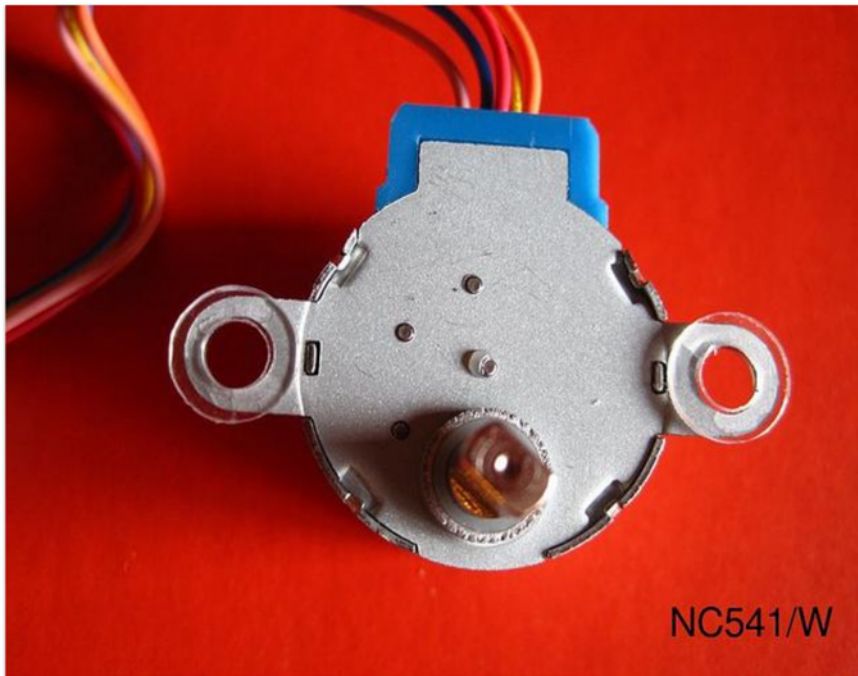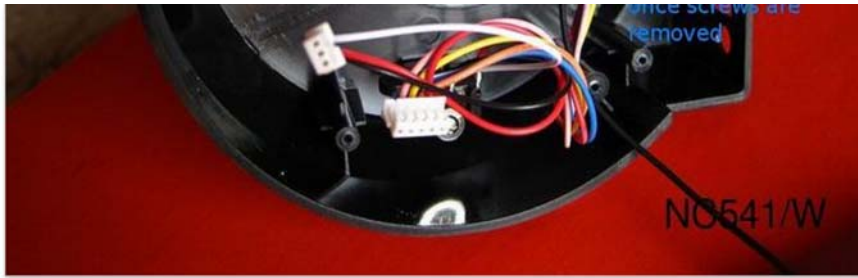

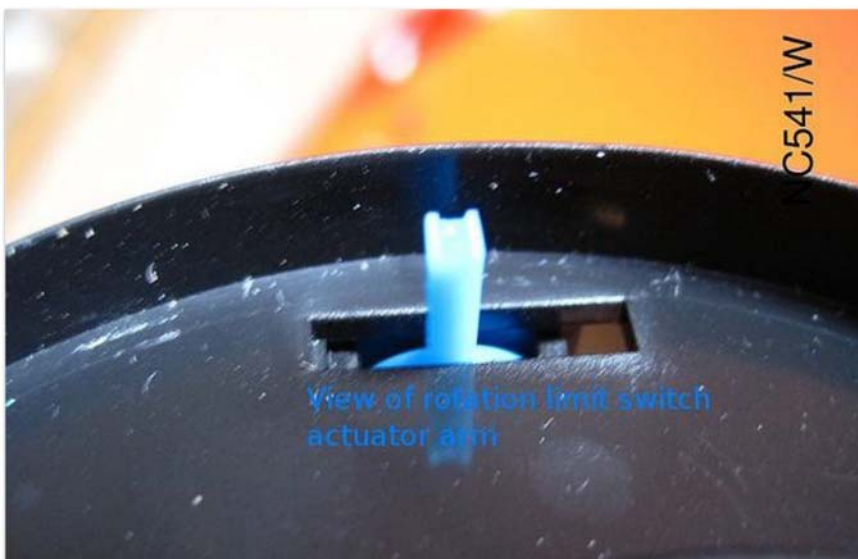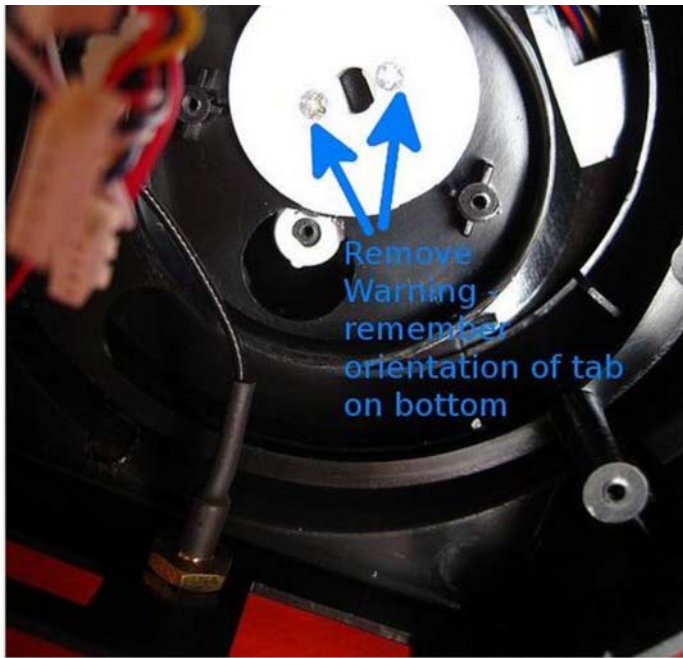



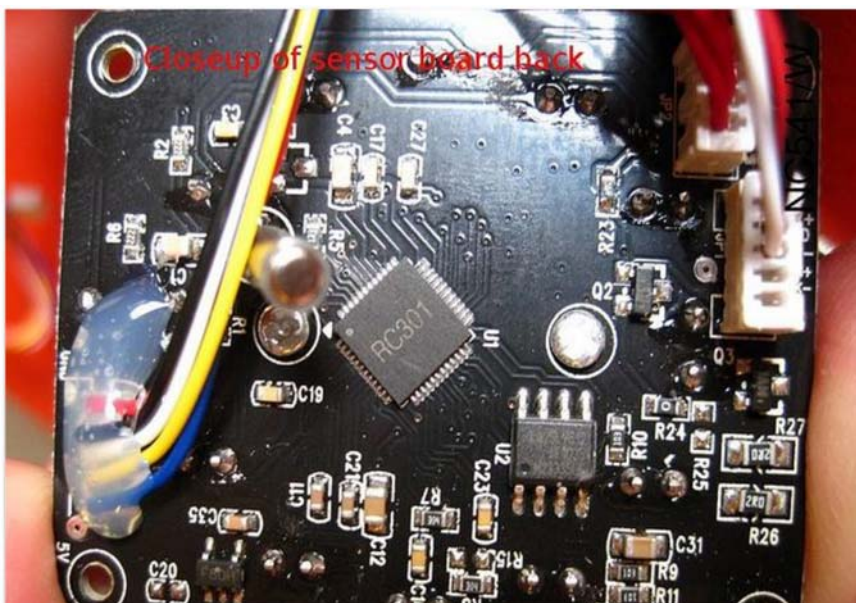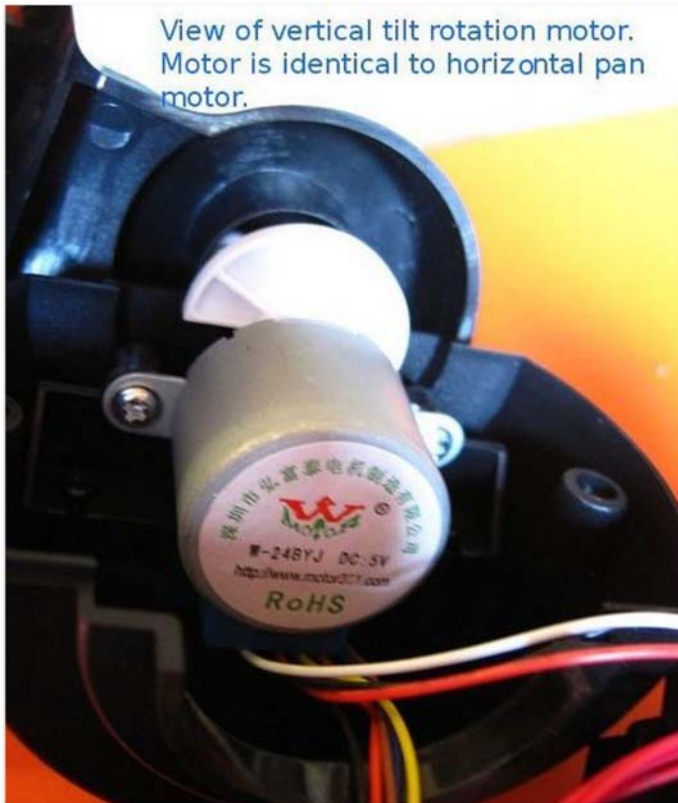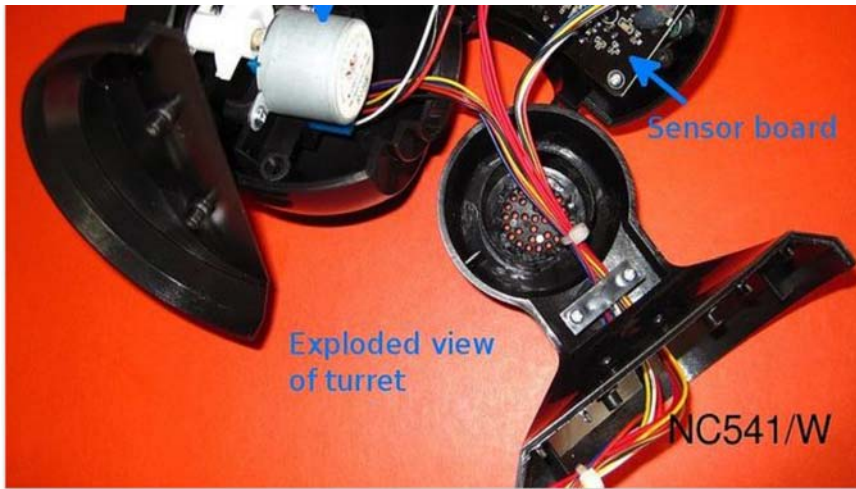

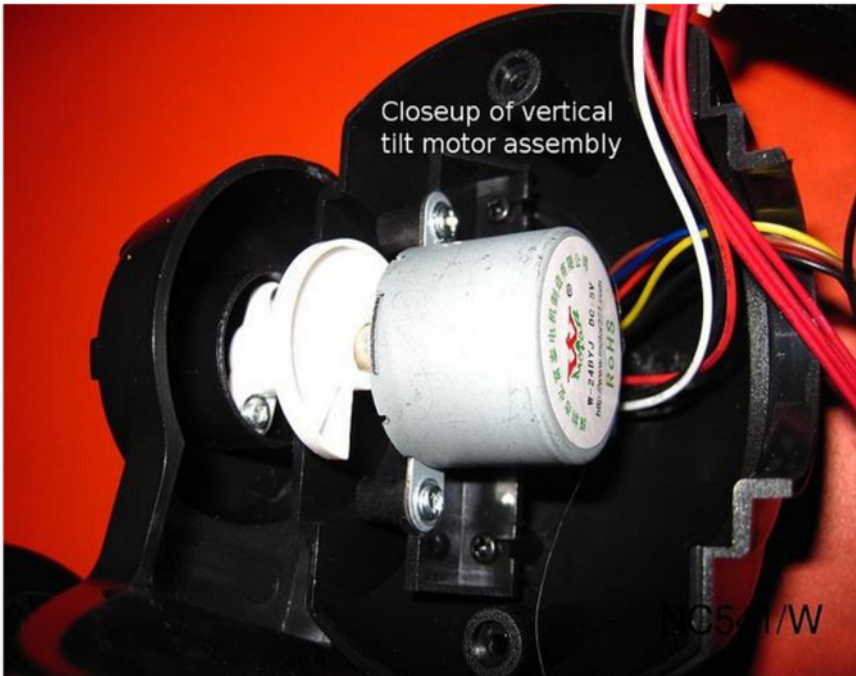



Category: Tweak Apexis, easyse, Epyx, Eye Sight Technology, Foscam, Heden, Hootoo, Instar, IPCam, Trenvis, wansview, Zaapa

Comments (0)

Forum & Firmware now available to Public

Posted by admin on Saturday, 31 December, 2011

1 Tweet 0 Share Like

Just start the forum (forum.icamwire.com) and it is now open for public. Hope this forum being the place we share information about cloned camera firmware. Enjoy!

Category: News Apexis, easyse, Epyx, Eye Sight Technology, Foscam, Heden, Hootoo, Instar, IPCam, Trenvis, Zaapa

Comments (0)

H.264 IP Camera still in “beta”

Posted by admin on Wednesday, 28 December, 2011

0 Tweet 0 Share Like

If you are going to buy a cloned ip camera, always bear in mind that nearly all the H.264 IP Camera in china is not mature. For some of the unbranded H.264 IP Camera, although they are from the same solution provider, however what I find is there are some difference in term of stability, no matter if they are in wired mode, wireless mode or “Card Mode”(MicroSD Card inserted).

As every people know the mjpeg clone camera continues dropping price as well as profit margin. In the stand point of vendors. They are trying to move to the market of “mjpeg + h.264” ip camera. This kind of solution as I know there are 2 key solution players in China. This kind of solution is always in “beta mode”. You can see lots of China vendors are unwilling to release them “officially” if the vendors core business is of OEM. So I don’t suggest people to buy new developed ip camera in china unless you want to be a “white rat”. Or if you really insist, ok, visit the camera support forum first before making decision. If the vendors do not have a support forum, you would not be able to get the support.

Category: [News](#) [Apexis](#), [easyn](#), [easyse](#), [Epyx](#), [Eye Sight Technology](#), [Foscam](#), [Heden](#), [hootoo](#), [Hootoo](#), [Instar](#), [IPCam](#), [smarteye](#), [Trenvis](#), [vstarcam](#), [wansview](#), [Zaapa](#)

[Comments \(0\)](#)

Spy Mouse support remote GSM phone dial-in

Posted by [admin](#) on Wednesday, 28 December, 2011



0

[Tweet](#)

0

[Share](#)

[Like](#)

When you watch the film of 007, you can find the actor using spy device for remote listening the target. However, in real life, you can find such device in form of a USB mouse.

[Continue reading "Spy Mouse support remote GSM phone dial-in" »](#)

Category: [News](#) [Apexis](#), [easyse](#), [Epyx](#), [Eye Sight Technology](#), [Foscam](#), [Heden](#), [Hootoo](#), [Instar](#), [IPCam](#), [Spy mouse](#), [surveillance](#), [Trenvis](#), [Zaapa](#)

[Comments \(0\)](#)

Marketing Share of Cloned IP Camera in China

Posted by [admin](#) on Monday, 26 December, 2011



1

[Tweet](#)

0

[Share](#)

[Like](#)

Sources near Cloned IP Camera vendors said the total volume shipment per month of cloned ip camera in china (PTZ, WiFi) is about 80 thousands unit. Foscam leads number 1, Second is Wanview, Maygio and EasyN leads third, Vstarcam is one the fastest growth with 15K shipment per month within a half year. **Editor Notes: The shipment data is just a rumor in industry and is not being verified. So no one know the answers. Trust or not is of your side.**

[Continue reading "Marketing Share of Cloned IP Camera in China" »](#)

Category: [News](#) [Apexis](#), [easyn](#), [easyse](#), [Epyx](#), [Eye Sight Technology](#), [Foscam](#), [Heden](#), [Hootoo](#), [Instar](#), [IPCam](#), [Trenvis](#), [vstarcam](#), [wansview](#), [Zaapa](#)

[Comments \(0\)](#)

New firmware released for Foscam FI8918W (11.22.2.36)

Posted by [admin](#) on Monday, 26 December, 2011



0

[Tweet](#)

0

[Share](#)

[Like](#)

Source near Foscam said FI8918W new firmware long for, is finally released.

Firmware version — 11.22.1.36

Web user interface — 2.4.18.16

Below are the enhance new features & resolved bugs list:

New features of this firmware:

- 1)Add msn function(old cameras cannot use this function);
- 2)Add daylight saving time;
- 3)Support audio on firefox;google chrome
- 4)Support special characters on wireless SSID,wireless key and alias;
- 5)Support hidden SSID in router;
- 6)Support gmail for sender on mail service settings(old cameras still not support);
- 7)Improve UPNP function;

Resolved bugs:

- 1)Fix the Sunday bugs;
- 2)Fix receiving scrambled codes in emails when alarm;

Category: [IP Surveillance](#) [Apexis](#), [easyse](#), [Epyx](#), [Eye Sight Technology](#), [Foscam](#), [Heden](#), [Hootoo](#), [Instar](#), [IPCam](#), [Trenvis](#), [Zaapa](#)

R&D Teams out from EasyN to Vstarcam

Posted by [admin](#) on Saturday, 17 December, 2011



Sources near the China IP Camera industry said there has a team of R&D people leaving EasyN recently and startup another company called Vstarcam. The R&D team is mainly responsible for developing the surveillance software and his camera cloud. Their left indicates the aspect of this development of EasyN is halt.


Category: [News](#) [Apexis](#), [easyn](#), [easyse](#), [Epyx](#), [Eye Sight Technology](#), [Foscam](#), [Heden](#), [Hootoo](#), [Instar](#), [IPCam](#), [Trenvis](#), [vstarcam](#), [Zaapa](#)

[Comments \(0\)](#)

Foscam, Hiware, Wansview, EasyN & Apexis

Secret

Posted by [admin](#) on Friday, 16 December, 2011



For those IP Camera of China, people will know more about Foscam because they think Foscam is the genius of this kind PTZ Wifi Camera. Actually, like Foscam, Hiware, Hiware, Wanview, EasyN, EasyN and Apexis, the ip camera solution comes from a solution provider call winbond. Under the solution provided by winbond, this camera manufacturer build their Web UI in the camera. So it is not difficult to see if you try to figure out the CGI API and Audio Codec, nearly all these camera have the same APIs.


Sources near IP Camera Manufacturers near china said those camera from Foscam is actually OEM by another factories. For those who have volume in manufacturing including only Hiware, Wansview (Smarteye), EasyN, Vstarcam, etc. Apexis IP Camera is a "sister" company from Foscam. The founder of Apexis is actually the wife one a founder in Foscam. So it is not difficult, you can see the channels of Foscam and Apexis are nearly the same.

Category: [IP Surveillance](#) [Apexis](#), [easyn](#), [easyse](#), [Epyx](#), [Eye Sight Technology](#), [Foscam](#), [Heden](#), [hiware](#), [Hootoo](#), [Instar](#), [IPCam](#), [Trenvis](#), [Wanview](#), [Zaapa](#)

[Comments \(0\)](#)

IP Camera Cloud from Hiware

Posted by [admin](#) on Sunday, 11 December, 2011



Hiware is one of ip camera manufacturers. With his core business in OEM, people wont see any brands of IP Camera under Hiware. Actually, like foscam, EasyN, EasySE, Wansview and lots IP Camera Vendors, most of them are using winbond solution.

Recently, Hiware (with ddns domain name xxxx.camcctv.com) has enhanced his OEM ip camera interface to a new one. Sources nearly hiware said the cloned camera now supports a beta version of ip camera cloud. This cloud is just like those offered by app.ipcam.hk, app.easyn.hk and app.ipcam.so.

Actually the cloud offered by Hiware in term of functionalities is a bit behind than others.





Category: Cloud Apexis, easyse, Epyx, Eye Sight Technology, Foscam, Heden, Hootoo, Instar, IPCam, Trenvis, Zaapa

Comments (0)

IP Camera Lens and Viewing Angle

Posted by admin on Sunday, 11 December, 2011





Many people don't know IP Camera's View angle and Distance before they buy this web camera, actually lens dimension, view angle and distance have relations.

Certainly not each IP Camera can adjust view angle manually or automatically, CIP Cam some network cameras lens can adjust view angle so have different view distance, but some ip cameras can't adjust lens, so they are fixed view distance and angle after they are manufactured.

What is the relation between lens dimension,view angle ,and view distance, different ip camera manufacturers may have different test data and standard, but below is reference for most factory, if using CCD sensor, that is always 1/3 Sony CCD in below data

IP Camera lens dimension,view angle and view distance relations		
LENS dimension(mm)	View Angle	Distance(m)for seeing License Plate Number
2.5mm	100°	1.5m
2.8mm	90°	2m
3.6mm	75°	2.5m
4mm	70°	3m
6mm	60°	5m
8mm	40°	7m
12mm	30°	9m
16mm	20°	20m
30mm	10°	30m
60mm	5°	50m for license plate number, 70m seeing person

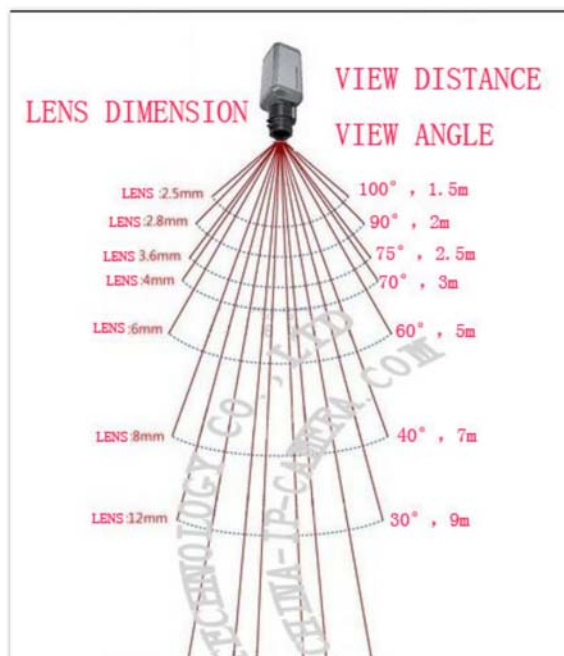

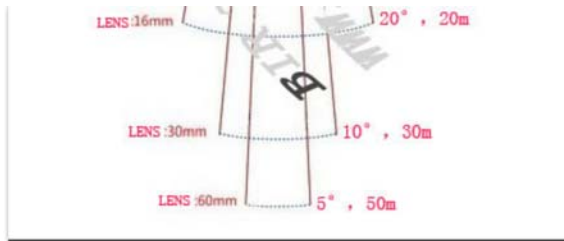

Category: [Tweak](#) [Apexis](#), [easyse](#), [Epyx](#), [Eye Sight Technology](#), [Foscam](#), [Heden](#), [Hootoo](#), [Instar](#), [IPCam](#), [Trenvis](#), [Zaapa](#)

[Comments \(0\)](#)

[1](#) [2](#) »

Page 1 of 2

Search

Search for:

Archives

March 2012
February 2012
January 2012
December 2011
October 1986